




## Grampo no sensor de corrente

Série GWSCCT691A

Seleção de tipo

Modelo	Entrada	Saída	Precisão	Frequência	Nível de tensão	Tensão suportável
GWSCCT69 1A-020	50A	50mA	0.1、0.2、0.5	50-400Hz	0.66KVac	3KV
	100A	50mA	0.1、0.2、0.5	50-400Hz		
	100A	100mA	0.1、0.2、0.5	50-400Hz		
	150A	100mA	0.1、0.2、0.5	50-400Hz		
	150A	50mA	0.1、0.2、0.5	50-400Hz		
	200A	100mA	0.1、0.2、0.5	50-400Hz		
	200A	500mA	0.1、0.2、0.5	50-400Hz		

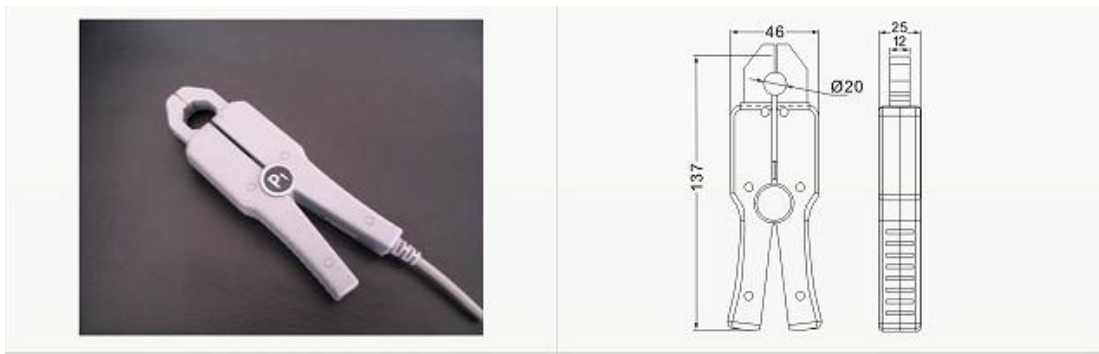

Modelo	Entrada	Saída	Precisão	Frequência	Nível de tensão	Tensão suportável
GWSCCT69 1A-050	100A	20mA	0.1、0.2、0.5	50-400Hz	0.66KVac	3KV
	200A	200mA	0.1、0.2、0.5	50-400Hz		
	500A	500mA	0.1、0.2、0.5	50-400Hz		
	800A	800mA	0.1、0.2、0.5	50-400Hz		
	1000A	800mA	0.1、0.2、0.5	50-400Hz		
	1200A	800mA	0.1、0.2、0.5	50-400Hz		
	200-1000A	1A/5A	0.1、0.2、0.5	50-400Hz		

Address: HeXi Distr,300222 Tianjin China.  
 Website:www.grewin-tech.com  
 Email:salesmanager@grewin-tech.com

Phone:+86-022-84943756  
 WhatsApp:+86-13072088960



Série GWSCCT692A  
Seleção de tipo

Modelo	Entrada	Saída	Precisão	Frequência	Nível de tensão	Tensão suportável
GWSCCT69 2A-085	100-1000A	50mA	0.1、0.2、0.5	50-400Hz	0.66KVac	3KV
	100-1000A	100mA	0.1、0.2、0.5	50-400Hz		
	250-1000A	150mA	0.1、0.2、0.5	50-400Hz		
	300-1000A	300mA	0.1、0.2、0.5	50-400Hz		
	500-1000A	500mA	0.1、0.2、0.5	50-400Hz		
	100-1200A	1A	0.1、0.2、0.5	50-400Hz		
	300-1200A	5A	0.1、0.2、0.5	50-400Hz		





# Tianjin Grewin Technology Co.,Ltd

Modelo	Entrada	Saída	Precisão	Frequência	Nível de tensão	Tensão suportável
GWSCCT69 2A-125	250-1000A	50mA	0.1、0.2、0.5	50-400Hz	0.66KVac	3KV
	300-1000A	100mA	0.1、0.2、0.5	50-400Hz		
	500-1500A	150mA	0.1、0.2、0.5	50-400Hz		
	600-1200A	300mA	0.1、0.2、0.5	50-400Hz		
	1000-3000A	500mA	0.1、0.2、0.5	50-400Hz		
	1000-3000A	1A	0.1、0.2、0.5	50-400Hz		
	1000-3000A	5A	0.1、0.2、0.5	50-400Hz		



Address: HeXi Distr,300222 Tianjin China.  
 Website:www.grewin-tech.com  
 Email:salesmanager@grewin-tech.com

Phone:+86-022-84943756  
 WhatsApp:+86-13072088960